



N. C. DEPARTMENT OF TRANSPORTATION  
DIVISION OF HIGHWAYS  
TRAFFIC ENGINEERING BRANCH  
SIGNING DEPARTMENT


**SIGN NUMBER:** SP04271      **BACKG COLOR:** White/Flourescent Yellow-Green  
**TYPE:** D                        **COPY COLOR:** Black  
**QUANTITY:** 1  
**SIGN WIDTH:** 7'-6"            **HEIGHT:** 2'-0"  
**TOTAL AREA:** 15.0 Sq.Ft.  
**BORDER TYPE:** RECESSED      **RECESS:** 0.38"  
**WIDTH:** 0.63"                  **RADIUS:** 1.5"  
**NO.** Z BARS:                  **LENGTH:**  
**MAT'L:** 0.125" (3.2 mm) ALUMINUM

**USE NOTES: 2,4,7**

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Panel shall be fluorescent yellow-green Type III reflective sheeting.

**DESIGN BY:** BSESSIONS      **CHECKED BY:**  
**TEPPL TOPIC:** C-36      **DIV:** STATEWIDE

*John P. Edwards*

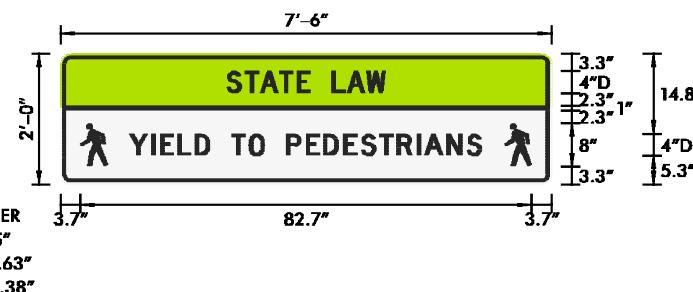

## LETTER POSITIONS

Spacing Factor is 1 unless specified otherwise



N. C. DEPARTMENT OF TRANSPORTATION  
DIVISION OF HIGHWAYS  
TRAFFIC ENGINEERING BRANCH  
SIGNING DEPARTMENT

**SIGN NUMBER:** SP04272    **BACKG COLOR:** Fluorescent Yellow-Green/White  
**TYPE:** D                **COPY COLOR:** Black

**QUANTITY:**

**SIGN WIDTH: 2'-0"**  
**HEIGHT: 2'-6"**

**BORDER TYPE: RECESSED**  
**RECESS: 0.38"**  
**WIDTH: 0.63"**  
**RADIi: 1.5"**

**NO. Z BARS:** **MAT'L: 0.063" (1.6 mm) ALUMINUM**  
**LENGTH:**


**USE NOTES: 2,4,7**

1. Legend and border shall be direct applied Type III reflective sheeting.
  2. Legend and border shall be direct applied non-reflective sheeting.
  3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
  4. Background shall be Type III reflective sheeting.
  5. Background shall be Type I reflective sheeting.
  6. Center arrow(s) vertically on sign.
  7. Top panel shall be fluorescent yellow-green Type III reflective sheeting.

**DESIGN BY: BSESSIONS**

**CHECKED BY:**  
**DIV: STATEWIDE**

*Hugh Plimpton*

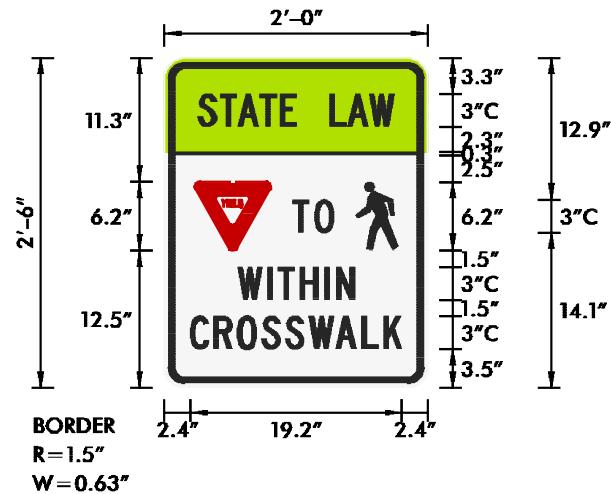

## LETTER POSITIONS

**Letter spacings are to start of next letter**

Spacing Factor is 1 unless specified otherwise



N. C. DEPARTMENT OF TRANSPORTATION  
DIVISION OF HIGHWAYS  
TRAFFIC ENGINEERING BRANCH  
SIGNING DEPARTMENT

**SIGN NUMBER:** SPD4302      **BACKG COLOR:** Fluorescent Yellow-Green/White  
**TYPE:** D                        **Flourescent Yellow-Green**  
**QUANTITY:** 1                   **COPY COLOR:** Black  
  
**SIGN WIDTH:** 4'-0"            **SYMBOL**      **X**      **Y**      **WID**      **HT**  
**HEIGHT:** 3'-6"                **YIELD**      6.4      13.4      16.7      15  
**TOTAL AREA:** 14.0 Sq.Ft.    **6\_12**      32.3      13.6      9.3      15  
  
**BORDER TYPE:** RECESSED                          
**RECESS:** 0.63"                                    
**WIDTH:** 0.88"                                    
**RADIUS:** 2.25"                                   
  
**NO.**      **Z BARS:**      **MAT'L:** 0.125" (3.2 mm) ALUMINUM  
**LENGTH:**

**USE NOTES: 2,4,7**

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Top and bottom panel shall be fluorescent yellow-green Type III reflective sheeting.

**DESIGN BY:** BSESSONS  
**TEPPL TOPIC:** C-36

CHECKED BY:  
DIV: STATEWIDE



Note: 0.800 spacing factor for "WITHIN CROSSWALK"

**Note:** For Mast-Arm Installation

## LETTER POSITIONS

Spacing Factor is 1 unless specified otherwise

**FILE NAME: TERRI**

NORTH CAROLINA D.O.T. SIGN DETAILS